
AccurioLabel 230

Digital Label Printing

Major specifications for AccurioLabel 230 (Printer main body only)

	, , , , , , , , , , , , , , , , , , , ,	
Туре	Console	
Print method	Dry-toner electrophotography	
Color support	Full color (CMYK)	
Printing resolution/gradation	3,600 dpi (equivalent) × 1,200 dpi / 8 bit	
Printing image size (Max)	12.6×18.9 Inch (non-banner) 12.6×47 Inch(banner)	
Paper width	10 – 13 Inch	
Paper thickness range	81-256 gsm (80-50 µm)	
Print media	Non-tack paper (81–176 gsm)	
	Tack paper (136-256 gsm)	
	Tack coated paper G/M (136–256 gsm)	
	Tack Synthetic paper (136–176 gsm)	
	Tack PP (136-176 gsm)	
	Tack PET (136-216 gsm)	
Print speed Speed range	Max.: 23.4 m/min. (76 fpm)	
	High: 18.9 m/min. (62 fpm)	
	Middle: 13.5 m/min. (44 fpm)	
	Low: 9.45 m/min. (31 fpm)	
By media	81-176 gsm: Max. 23.4 m/min.	
weight	177-256 gsm: Max. 18.9 m/min.	
Compatible file formats	PS, PDF (APPE supported), 8 bit TIFF	
VDP file format	PPML, PDF-VT	
Power source (Single phase)	Metric: 220-240 V 50/60 Hz, 25 A	
	Inch: 208-240 V 60 Hz, 24 A	
Max. power consumption	Metric: 6,000 W, Inch: 5,760 W	
Dimensions (W × D × H)	1,200 × 903 × 1,478 mm (47.2 × 35.5 × 58.1 Inch)	
Weight	292 kg (644 lbs)	

^{*} Specifications and features of the delivered product are subject to changes.

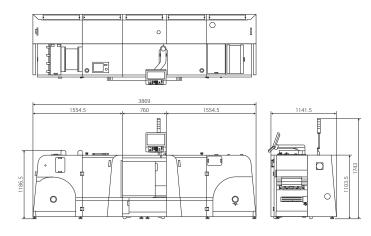

Specifications for RW/UW

Maximum roll size	24.4 inch	
Paper thickness	80-250 μm	
Power supply	200-240 V AC 16 A 50/60 Hz and	
for the unit	PE RCCB that breaks at a leakage current of 350 mA	
Air supp l y	5-6 bar (72-87 psi) > 20 L/min (5 gal/min)	
	Air must be clean, oil and water free	
Dimensions (W × D × H)	3,869 × 1,141 × 1,103 mm (12.6 × 3.7 × 3.6 Feet)	
Weight	650 kg (1,433lbs)	
•		

Specifications for embedded controller

Type	Embedded (AIO) type	
	Equivalent to IC-605B with UK-104	
CPU	Intel Core i5 4570S 2.9 GHz (CPU in printer)	
Memory	System Memory 16 GB	
HDD	1 TB × 3 + 500 GB × 1	
Network	10/100/1000 Base-T	
PDL Language	PostScript 3 (CPSI 3020), PDF Ver.1.7,	
	TIFF Ver.6 Compliant, PPML Ver.2.2, PCL5c equivalent,	
	PCL XL (PCL6 Ver.3) equivalent, APPE Ver.4.6*1,	
	PDF/VT Ver.2*1	
Protocol	TCP/IP, NetBEUI, IPP, WSD, SMB, Bonjour	
OS applicable	Windows 7, 8.1, 10	
	Windows Server 2008/R2, 2012/R2, 2016, 2019	
	(Includes 64 bit versions)	
	Mac OS X 10.9, 10.10, 10.11, 10.12, 10.13, 10.14	
Main fonts	Adobe 136 fonts, PCL 80 fonts	
Driver	PS Plugin driver	
Konica Minolta	PS Web Connection, PS Net care Device Manager,	
applications applicable	Color Centro, AccurioPro Hot Folder	

^{*1} UK-218 (Option) required











*1 Optional

PARTNERSHIP

Konica Minolta can help give shape to your ideas and partner with you to achieve your corporate objectives. Contact us to realize opportunities in:

INFORMATION MANAGEMENT	IT SERVICES	TECHNOLOGY
Enterprise Content Management (ECM)	Application Services	Office Multifunction Business Solutions
Document Management	Cloud Services	Commercial and Production Printers
Automated Workflow Solutions	IT Security	Industrial Printers
Business Process Automation	Managed IT Services	Wide Format Printers
Security and Compliance	IT Consulting & Projects	3D Printers
Mobility	Apple Managed Services	Scanners
eDiscovery Services	Managed Voice Services	Security Surveillance Systems
	Technology Implementation and Deployment	Laptops, Desktops and Computer Hardware
		Servers and Networking Equipment
		Managed Print Services (MPS)
		Managed Enterprise Services



KONICA MINOLTA BUSINESS SOLUTIONS U.S.A., INC. 100 Williams Drive, Ramsey, New Jersey 07446

CountOnKonicaMinolta.com





